




Bearing?Power Machinery Co., Ltd.

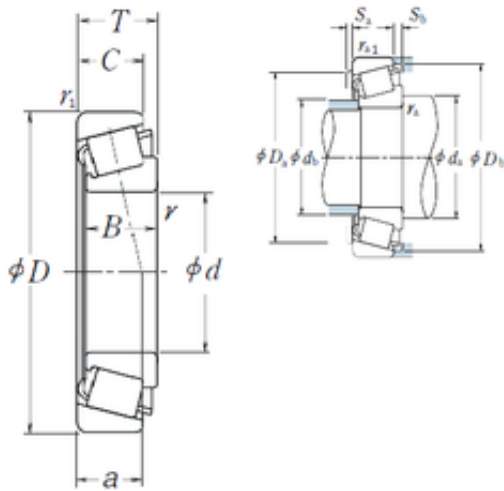

NSK 32330 tapered roller bearings

Bearing No. 32330

Size	150x320x114 mm
Bore Diameter	150 mm
Outer Diameter	320 mm
Width	114 mm
d	150 mm
D	320 mm
T	114 mm
B	108 mm
C	90 mm
a	81,5 mm
r min.	5 mm
r1 min.	4 mm
da min.	182 mm
Da min	262 mm
Da max.	302 mm
db max.	191 mm
Db min.	297 mm
ra max.	4 mm
rb max.	3 mm
Weight	41,4 Kg
Basic dynamic load rating (C)	1120 kN
Basic static load rating (C0)	1700 kN
(Grease) Lubrication Speed	1100 r/min
(Oil) Lubrication Speed	1500 r/min
Calculation factor (e)	0,37
Calculation factor (Y0)	0,88

32330 Bearing 2D drawings and 3D CAD models



Bearing?Power Machinery Co., Ltd.

Category	Bearings
Inventory	0.0
Manufacturer Name	NSK
Minimum Buy Quantity	N/A
Weight / Kilogram	40
Product Group	B04334
LangID	1
outer r	4
D_	320
TC-BET22	50
TC-BET21	3
TC-BET23	0
inner r	5
mass	41.4
GRS rpm	1100
D_b	297
Cr	114000
TC-RA	609.935
DE_	274.44
T-ALP23	0
db	191
T-ALP22	0
Prod_Type3	TRBSR_MD_A
da	182
T-ALP21	28
Iso	-
ALPHA_	14
SDM_	237.65
SBRG	23
D_a2	262
hidYobi	32330
Y1	1.6



Bearing?Power Machinery Co., Ltd.

D_a1	302
B_	108
hidTable	ecat_NSTPRM
Oil rpm	1500
C0r	174000
Y0	0.88
TC-SLR	81
inner ra	4
outer rb	3
C0	1700
Sa	8
Sb	24
e	0.37
DA_	38.099
Z_	16
C_	90
yobi	32330
TC-DA1	40.797
TC-DA2	35.401
KBRG	3111
DI_	200.86